



# LCD Basic Operations


## Warning Indicator

When the “Temp” indicator lights red, it indicates the projector has overheated. The projector will automatically shut itself down.

## Adjusting the Projected Image


*The projector is equipped with adjustable feet to raise and lower the image to fill the screen.*

1. Locate the adjustable foot you wish to modify on the underside of the projector.
2. Rotate the adjustable ring clockwise to lower it. Repeat with remaining feet as necessary.

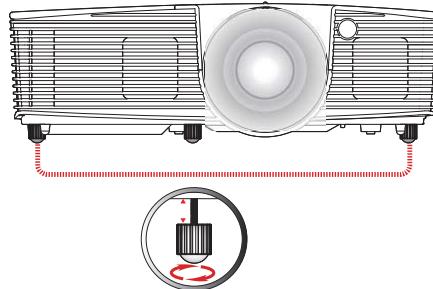

## Adjusting the Projector Zoom and Focus

*You may turn the zoom lever to zoom in or out. To focus the image, rotate the focus ring until the image is clear.*

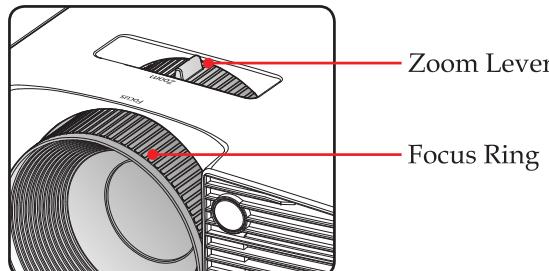

# LCD Basic Operations


## Warning Indicator

When the “Temp” indicator lights red, it indicates the projector has overheated. The projector will automatically shut itself down.

## Adjusting the Projected Image


*The projector is equipped with adjustable feet to raise and lower the image to fill the screen.*

1. Locate the adjustable foot you wish to modify on the underside of the projector.
2. Rotate the adjustable ring clockwise to lower it. Repeat with remaining feet as necessary.

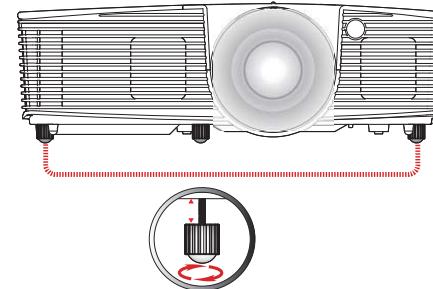


## Adjusting the Projector Zoom and Focus

*You may turn the zoom lever to zoom in or out. To focus the image, rotate the focus ring until the image is clear.*

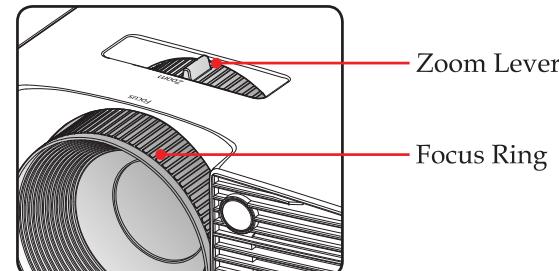


## Connect to Computer/Notebook

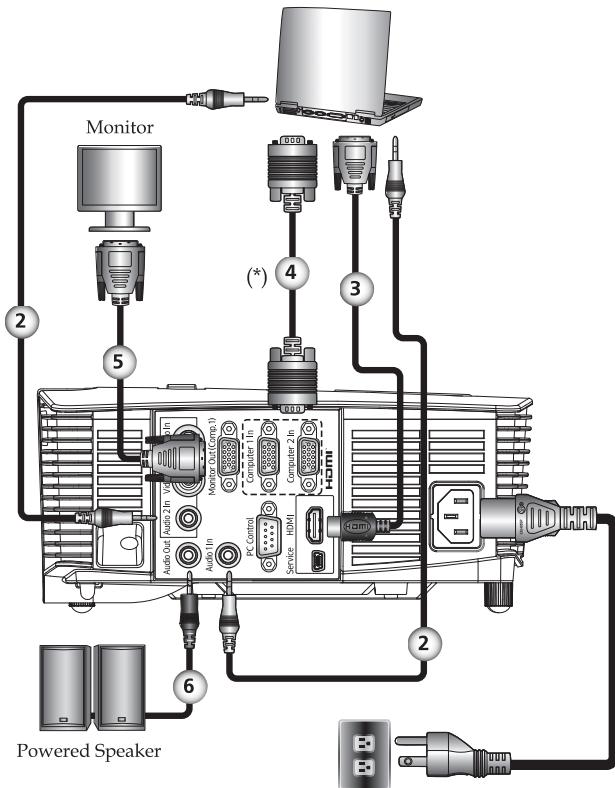

1.....	Power cord (supplied)
2.....	Audio cable
3.....	HDMI/DVI cable
4.....	RGB cable (supplied)
5.....	RGB cable
6.....	Audio cable

- Make sure that the power plug is fully inserted into both the projector AC inlet and the wall outlet.
- The AC outlet must be near this equipment and must be easily accessible.

## Connect to Computer/Notebook

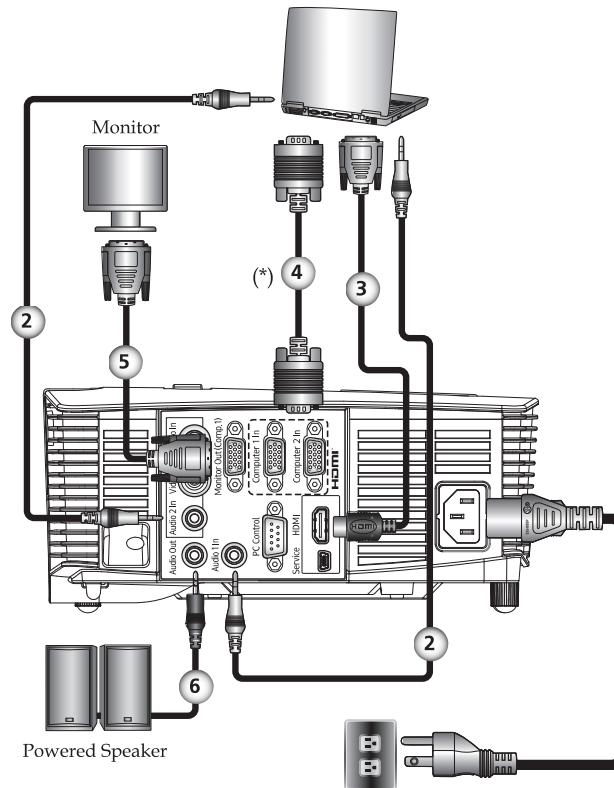

1.....	Power cord (supplied)
2.....	Audio cable
3.....	HDMI/DVI cable
4.....	RGB cable (supplied)
5.....	RGB cable
6.....	Audio cable

- Make sure that the power plug is fully inserted into both the projector AC inlet and the wall outlet.
- The AC outlet must be near this equipment and must be easily accessible.