

Car Health Monitor Agreement

Policy for Borrowing and Use Outside of the Library

- You must have a valid library card to checkout.
- Patron must be a resident of Clinton or Macomb Township's service area.
- Patron must be in good standing with the library and have no fines above \$15.00.



Car Health Monitor Agreement


Policy for Borrowing and Use Outside of the Library

- You must have a valid library card to checkout.
- Patron must be a resident of Clinton or Macomb Township's service area.
- Patron must be in good standing with the library and have no fines above \$15.00.




FIXD Installation Guide

- 1 Download the FIXD App on your smartphone. Do not open the app until Step 4.

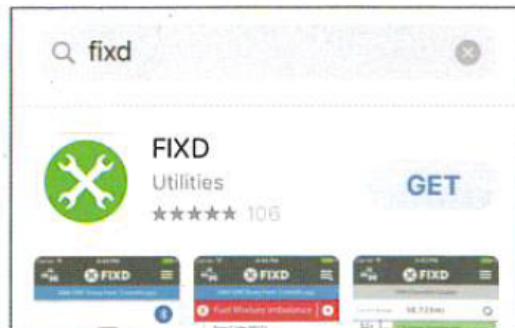

FIXD Installation Guide

- 1 Download the FIXD App on your smartphone. Do not open the app until Step 4.

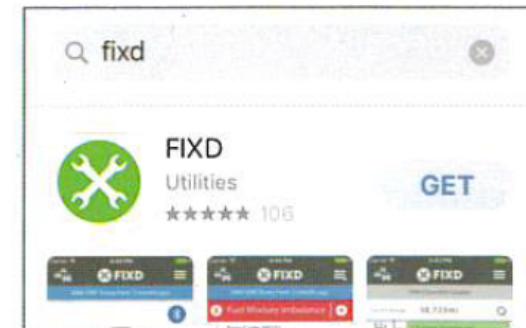

Fines and Liability

- The overdue fine is \$1.00 per day until returned.
- The patron is responsible for costs associated with the loss or damage of the Car Health Monitor and/or peripherals.

Replacement Parts:

Car Health Monitor \$50.00

Bag: \$5.00

Fines and Liability

- The overdue fine is \$1.00 per day until returned.
- The patron is responsible for costs associated with the loss or damage of the Car Health Monitor and/or peripherals.

Replacement Parts:

Car Health Monitor \$50.00

Bag: \$5.00

2

Make sure Bluetooth is enabled on your smart-phone. This can be accomplished through the Settings menu on your device.

3

Turn your vehicle on and leave the engine running for five seconds before opening the FIXD App.

2

Make sure Bluetooth is enabled on your smart-phone. This can be accomplished through the Settings menu on your device.

3

Turn your vehicle on and leave the engine running for five seconds before opening the FIXD App.

4 Open the FIXD App and tap 'Register'. Input your information to register for a FIXD Account.

5 Input the FIXD Sensor Code (located on the back of your Sensor) into the FIXD App.

7 In the FIXD App, tap to add the FIXD Sensor.

8 Name your FIXD Sensor and hit 'Register' to start your first vehicle health scan.

NOTE - FIXD requires a data connection and at least 3 bars of cellular coverage to function properly.

4 Open the FIXD App and tap 'Register'. Input your information to register for a FIXD Account.

5 Input the FIXD Sensor Code (located on the back of your Sensor) into the FIXD App.

7 In the FIXD App, tap to add the FIXD Sensor.

8 Name your FIXD Sensor and hit 'Register' to start your first vehicle health scan.

NOTE - FIXD requires a data connection and at least 3 bars of cellular coverage to function properly.

6

Plug the FIXD Sensor into the OBD-II port. The port is commonly located beneath the dash near the locations shown below.



Can't Find It? support@fixdapp.com

6

Plug the FIXD Sensor into the OBD-II port. The port is commonly located beneath the dash near the locations shown below.



Can't Find It? support@fixdapp.com

*Have additional questions or
need help installing FIXD?*

Check out
fixdapp.com/help

or email us at
support@fixdapp.com

*Have additional questions or
need help installing FIXD?*

Check out
fixdapp.com/help

or email us at
support@fixdapp.com