


# Portable Monitor

## Quick Start Guide

### Function Keys & Ports Introduction

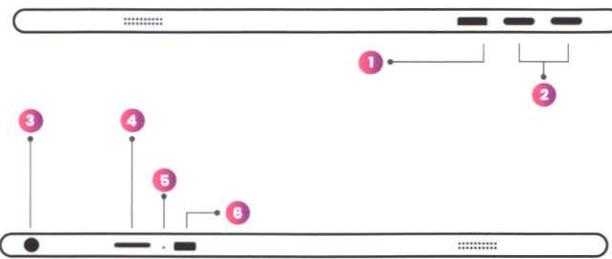

① Mini HDMI

② Full Function Type-C Port (For power, video, audio and touch signal)

③ 3.5mm Headphone Jack

④ Multi-Function Key

a. Press in the middle: Deploy the menu  
b. Scroll up/down: Navigate the menu

⑤ Power Indicator Light

⑥ Power Button

a. Press the button for 5seconds: Turn off  
Short press when on the menu: Go back to the previous step


#### Tips:

Please use the original USB-C to USB-C cable that came with the monitor in box. Don't use the other cables.


### Connection Method

#### Full Function Type-C Mode

If your laptop supports USB Type-C 3.1 with PD protocol that can output audio and video or Thunderbolt with USB-C interface, you can connect the monitor with your laptop via one USB-C to USB-C 3.1 cable.

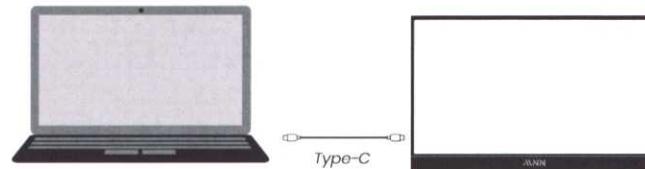


#### Samsung DEX Mode/Huawei EMUI Mode

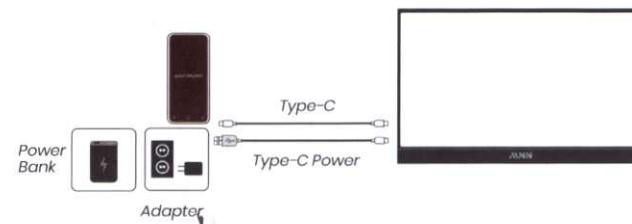

#### HDMI Mode (For No Type-C Device)


##### 1. Connect with Laptop/Desktop Computer

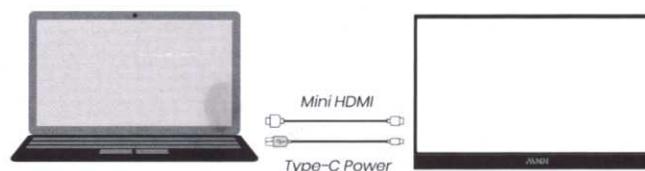

1. For 1080P monitor, USB3.0 on the computer can supply the power

2. For 4K monitor, it is recommended to use an extra PD power

##### 2. Connect with PS4/PS5 or XBOX

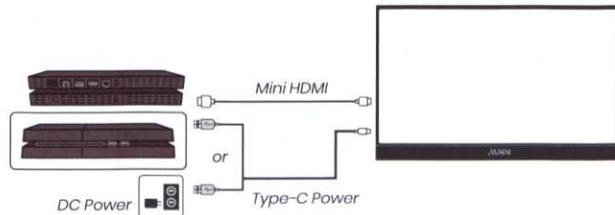

1. The USB 3.0 on the PS4/PS5/XBOX can supply the power of 1080P monitor


2. For 4K monitor, it is recommended to use an extra PD Power

#### Nintendo Switch Mode


You can connect to your Switch via USB-C to USB-C 3.1 cable

**NOTICE:** Extra power is required (Use Switch Adaptor or others 60W)

##### 1. Connect with Switch DOCK

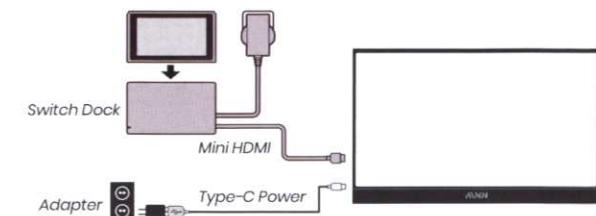

##### 2. Connected with Switch by USB-C to USB-C cable

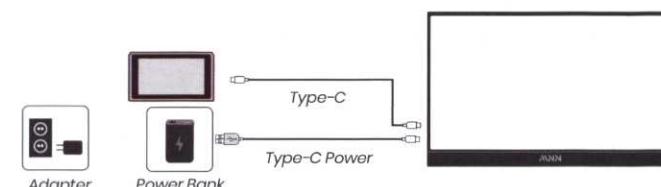


## Reverse Charging Function

When your monitor is connected to your device via the "Full Function Type-C Mode", you can charge your device by connecting an external power adapter via the "Type-C Power Port".

1. For 1080P monitor, DC 5V. 3A/9V. 2A or PD 5-20V power adapter is recommended.

## OSD Menu Introduction

1. Adjust brightness by pulling the key up
2. Adjust volume by pulling it down
3. Enter menu and go to submenu by pressing it
4. Exit menu and return to previous menu by pressing power button

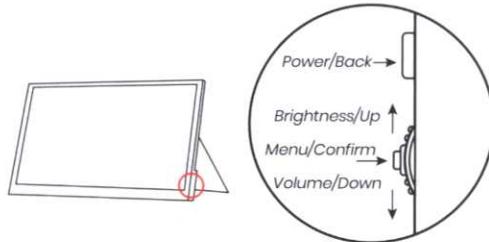

## Operation & Use Video



If you still don't clear about how to operate and use the display after watching the text instructions, please scan the QR code to watch the video tutorial to understand how to use and operate the monitor.

or  
scan  
me




## How To Use The Smart Case


The case can protect the display from dust and scratches

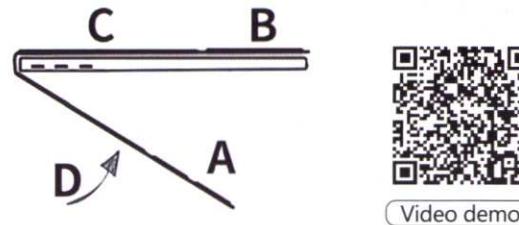

**Step 01:**  
Hold B steady with your hand, tilt C to support the monitor.



**Step 02:**  
Place the bottom of the monitor in the slot of D.  
\* Use the smart cover to make the monitor stands at a proper viewing angle.



**Step 03:**  
Fold part A of the smart cover back to support the monitor more stable.

### Tips:

If you want to take the cover support off from the monitor, Just use a screwdriver directly to unscrew the screws (B) that hold the monitor will be OK.

## Warranty, Return & Refund Policies

1. The monitor is guaranteed for 2 years. When there's a quality issue, the after-sales solutions include replacement, partial refund and full refund. The warranty does not cover damage caused by human factors, accident, misuse of the product, unauthorized alteration to or change of parts or components of the product, act of God or problems of power supply.

2. When you find some quality issues, please prepare some images and videos to prove it. Then contact us for technical support or after-sales solution. We will reply within 24 hours.

## Email US

Customer Support: [support@mnntech.com](mailto:support@mnntech.com)



## Customer Service



2 Years unlimited warranty



365 Days Money-Back Guarantee



No Reason Return for Replacement



Lifetime Customer Support